


PRODUCT DATA SHEET

SLIMLINE SURFACE ELECTROMAGNETIC LOCK

IDC510	Slimline Surface Magnet Unmonitored	AEM10001
IDC510-MON	Slimline Surface Magnet Monitored	AEM10002
IDC510-L	L Bracket for Slimline Surface Magnet	AEMBR008
IDC510-Z	Z & L Bracket for Slimline Surface Magnet	AEMBR089

- Low maintenance with no moving parts.
- Suitable for timber or metal doors with simple installation.
- Slimline profile suitable for single, or double doors, inward or outward opening.
- Holding force up to 600 lbs per door leaf (dependant on installation).
- Dual Voltage 12 or 24 v DC. Selectable on site.
- Current 500mA (12v), 250mA (24v).
- CE marked.
- Satin anodised aluminium finish.
- Safety bolts which prevent magnet from detaching from bracket.
- Dimensions - Magnet: 250mm x 42mm x 26mm
- Dimensions - Armature: 185mm x 38mm x 12.5mm

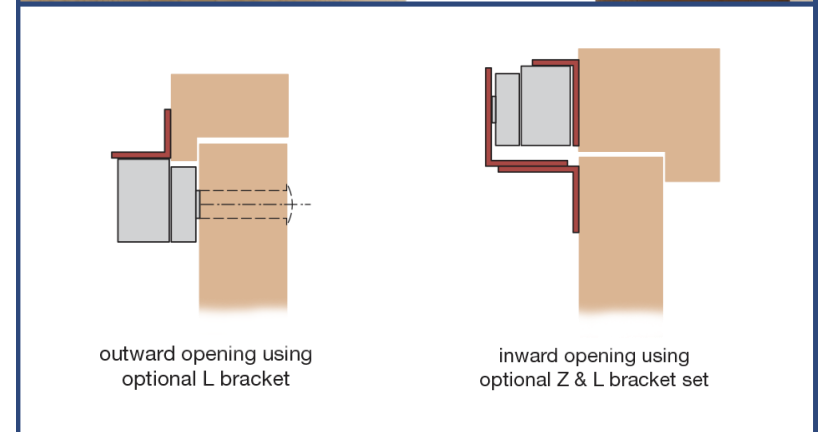

International Door Controls Ltd

Unit 23, Timmis Road
Lye, Stourbridge
West Midlands DY9 7BQ

Tel: 01384 893333 Fax: 01384 894837
Email: info@int-door-controls.com

PRODUCT:

SLIMLINE SURFACE MAGNET

CODE:

IDC510-x